


AES to Stereo Audio Converter AES-DA

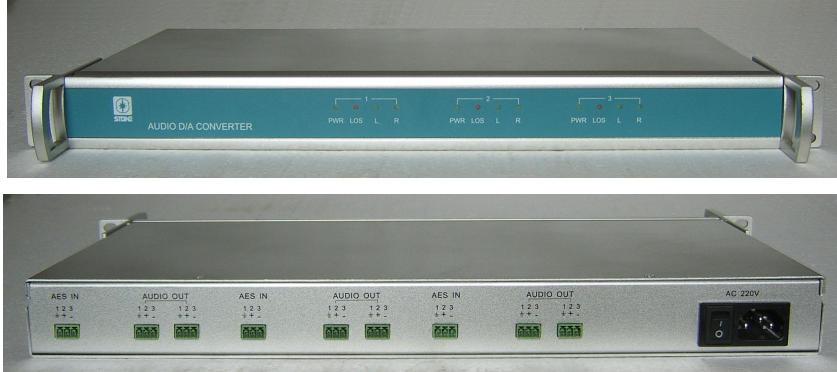

- 24-bit high performance AES to Stereo audio converter
- Typical dynamic range of 120dB
- Transformer balanced AES inputs
- Allows sampling rates from 32–96kHz
- 3 AES-DA modules can be included in 1 chassis

Stereo Audio Output		
1	Number of outputs	2 electronically balanced
2	Frequency response	0.5dB (20 Hz – 20 kHz)
3	Dynamic range	100dB
4	Passband ripple	+/- 0.0002 dB
5	THD+N	0.01%
6	Crosstalk	-100 dB
7	Output impedance	600 ohm
AES Input		
1	Output impedance	110 ohm
2	Format	AES3-2003, GY/T158-2000
3	Number of outputs	1
4	Sampling rates	44.1 kHz, 48 kHz, 96 kHz,
Other		
1	AC power	220 VAC
2	Dimensions	483 x 44 x 178 mm (19", 1RU) 3 modules can be included in 1 chassis