


## SDI to Composite Video Converter SDI-DA

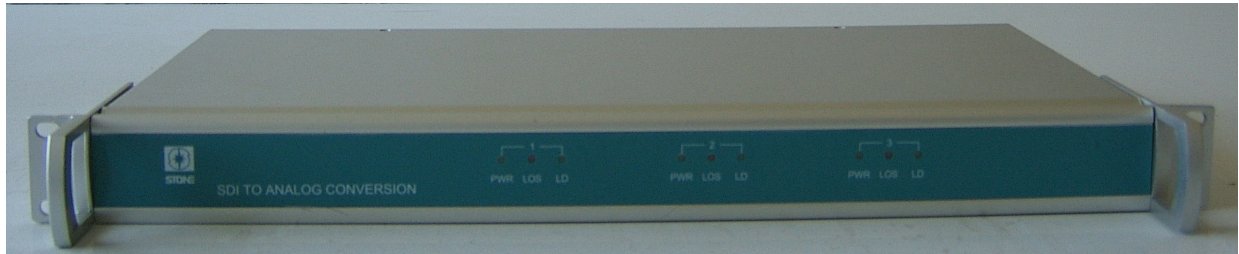

- 8-bit SDI to composite encoder and DA
- 1 SDI loop out and 2 composite outputs
- Automatic standards detection
- EDH monitoring
- 3 SDI-DA modules can be included in 1 19" 1RU chassis

## SDI-DA Specifications

<b>Composite video output</b>		
1	Formats	Composite video, PAL 625/50 or NTSC 525/60
2	Number of outputs	2
3	Signal level	1 V p-p
4	Impedance	75 ohm
5	Return loss	>40 dB up to 10 MHz
6	Connector	BNC
7	Video bandwidth	5.5 MHz
8	Signal path	8 bits
9	SNR	>60 dB typical
<b>SDI OUTPUT</b>		
1	Data rate NRZ	270 Mbps
2	Signal	4:2:2 SMPTE 259M-C
3	Inputs / outputs	1 Input, 1 loop out
4	Equalisation	Automatic
5	Impedance	75 ohm
6	Return loss in/out	>15 dB @ 270 MHz
7	Jitter	max 0.2 UI
8	connector	BNC
<b>Other</b>		
1	AC power	220 VAC
2	Dimensions	483 x 44 x 178 mm (19", 1RU) 3 modules can be included in 1 chassis

\* Specification subject to change without notice \*